

TANK FILTRATION

RETURN LINE SPIN-ON FILTERS



Type	Size	Type	Ports	Max Press	Bypass	Micron	Part Number
Single Element	1	Return	3/4 BSP	7 BAR	yes	10	MXA8551424
Single Element	1	Return	3/4 BSP	7 BAR	yes	25	MXA8511424
Single Element	1	Suction	3/4 BSP	7 BAR	yes	25	MXA8551223
Single Element	1	Suction	3/4 BSP	7 BAR	no	25	MXA8511023
Single Element	2	Return	1-1/4 BSP	7 BAR	yes	10	MXA9551424
Single Element	2	Return	1-1/4 BSP	7 BAR	yes	25	MXA9511424
Single Element	2	Suction	1-1/4 BSP	7 BAR	yes	25	MXA9511223
Single Element	2	Suction	1-1/4 BSP	7 BAR	no	25	MXA9511023
Double Element	3	Return	1-1/2 BSP	7 BAR	yes	10	MXA7551424
Double Element	3	Return	1-1/2 BSP	7 BAR	yes	25	MXA7511424
Double Element	3	Suction	1-1/2 BSP	7 BAR	yes	10	MXA7551223
Double Element	3	Suction	1-1/2 BSP	7 BAR	no	10	MXA7551023

TANK TOP FILLER / BREATHERS

Threaded



Type	Type	Thread	Displacement	Air Flow	Micron	Part Number
Breather	Unpressurised	1/4 BSPT	270 l/min	0.30m ³ /min	40	UCSAB156340
Breather	Unpressurised	1/4 BSPT	135 l/min	0.15m ³ /min	10	UCSAB156310
Breather	Unpressurised	3/4 BSPT	720 l/min	0.75m ³ /min	40	UCSAB156240
Breather	Unpressurised	3/4 BSPT	430 l/min	0.45m ³ /min	10	UCSAB156210

6 Hole Flange



Type	Type	Thread	Displacement	Air Flow	Micron	Part Number
Filler Breather	Unpressurised	6 hole Flange	750 l/min	0.75m ³ /min	40	UCAB116340
Filler Breather	Unpressurised	6 hole Flange	430 l/min	0.75m ³ /min	10	UCAB116310
Filler Breather	Unpressurised	6 hole Flange	270 l/min	0.45m ³ /min	40	UCAB138040
Filler Breather	Unpressurised	6 hole Flange	135 l/min	0.45m ³ /min	10	UCAB138010

SUCTION ELEMENTS



Thread	Flow	Length	Width	Micron	Part Number
1/2 BSP	15 l/min	105.5 mm	46 mm	125	UCSE1319
3/4 BSP	25 l/min	109.5 mm	64 mm	125	UCSE1320
1" BSP	50 l/min	139.5 mm	64 mm	125	UCSE1457
1-1/2 BSP	95 l/min	140 mm	86 mm	125	UCSE1323
1-1/2 BSP	130 l/min	200 mm	86 mm	125	UCSE1324
2" BSP	180 l/min	260 mm	86 mm	125	UCSE1326
2" BSP	225 l/min	150 mm	150 mm	125	UCSE1219
2-1/2 BSP	350 l/min	212 mm	150 mm	125	UCSE1220
3" BSP	500 l/min	272 mm	150 mm	125	UCSE1221

SIGHT INDICATORS

SIDE MOUNTED FLUID LEVEL INDICATORS



Without Thermometer

Bolt Size	Hole Centers	Part #
M10	76 mm	UCFL111
M12	76 mm	UCFL113
M10	127 mm	UCFL211
M12	127 mm	UCFL213
M10	254 mm	UCFL311
M12	254 mm	UCFL313

With Thermometer

Bolt Size	Hole Centers	Part #
M10	76 mm	UCFLT121
M12	76 mm	UCFLT123
M10	127 mm	UCFLT221
M12	127 mm	UCFLT223
M10	254 mm	UCFLT321
M12	254 mm	UCFLT323

SIGHT INDICATORS



Type	Size	Part #
Polyamide	1/4" BSPP	SLNS14
Polyamide	3/8" BSPP	SLNT38
Polyamide	1/2" BSPP	SLNT12
Polyamide	3/4" BSPP	SLNT34
Polyamide	1" BSPP	SLNT1


Type	Size	Part #
Aluminium	1/4" BSPP	SM14
Aluminium	3/8" BSPP	SM38
Aluminium	1/2" BSPP	SM12
Aluminium	3/4" BSPP	SM34
Aluminium	1" BSPP	SM1

MAGNETIC PLUGS



Size	Thread	Part #
1/4"	BSPP	TMA14
3/8"	BSPP	TMA38
1/2"	BSPP	TMA12
3/4"	BSPP	TMA34
1"	BSPP	TMA1

MAGNETIC LEVEL INDICATORS SERIES 34000

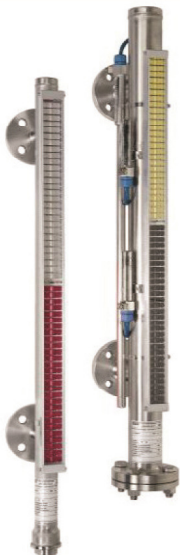

WEKA 34000 visual magnetic level indicators are versatile, high visibility, and made to custom lengths.

- Flanged or tube-lok connections
- Water, coolant or hydraulic fluids
- Up to 50 bar operating pressure
- Up to 250°C operating temperature
- 316 Stainless construction
- Drain and vent options
- Magnetic reed switches
- Custom lengths

